



*Stonegate*

WATER FEATURE WITH COLUMNS  
INSTALLATION INSTRUCTIONS

KEYSTONE®  
*Country Manor*




# KEYSTONE BUILDING IDEAS • WATER FEATURE WITH COLUMNS

## BASIC TOOLS

SAFETY		ALTERATIONS		LAYOUT		FINISHING		LEVELING		GENERAL		
												
Gloves	Safety Glasses	Stone Chisel	Mallet	Layout Stakes	Line	Caulking Gun	Concrete Adhesive (i.e. Keystone KapSeal™)	Level	Mallet	Shovel	Wheelbarrow	Hand Compactor


**Water Feature Note:**  
Install Water Feature and accessories as per manufacturer's installation instructions and local codes. Plan electrical service prior to construction. Notch out block units as needed for the accessory cords to exit the back of the water feature for connection to planned electrical service.

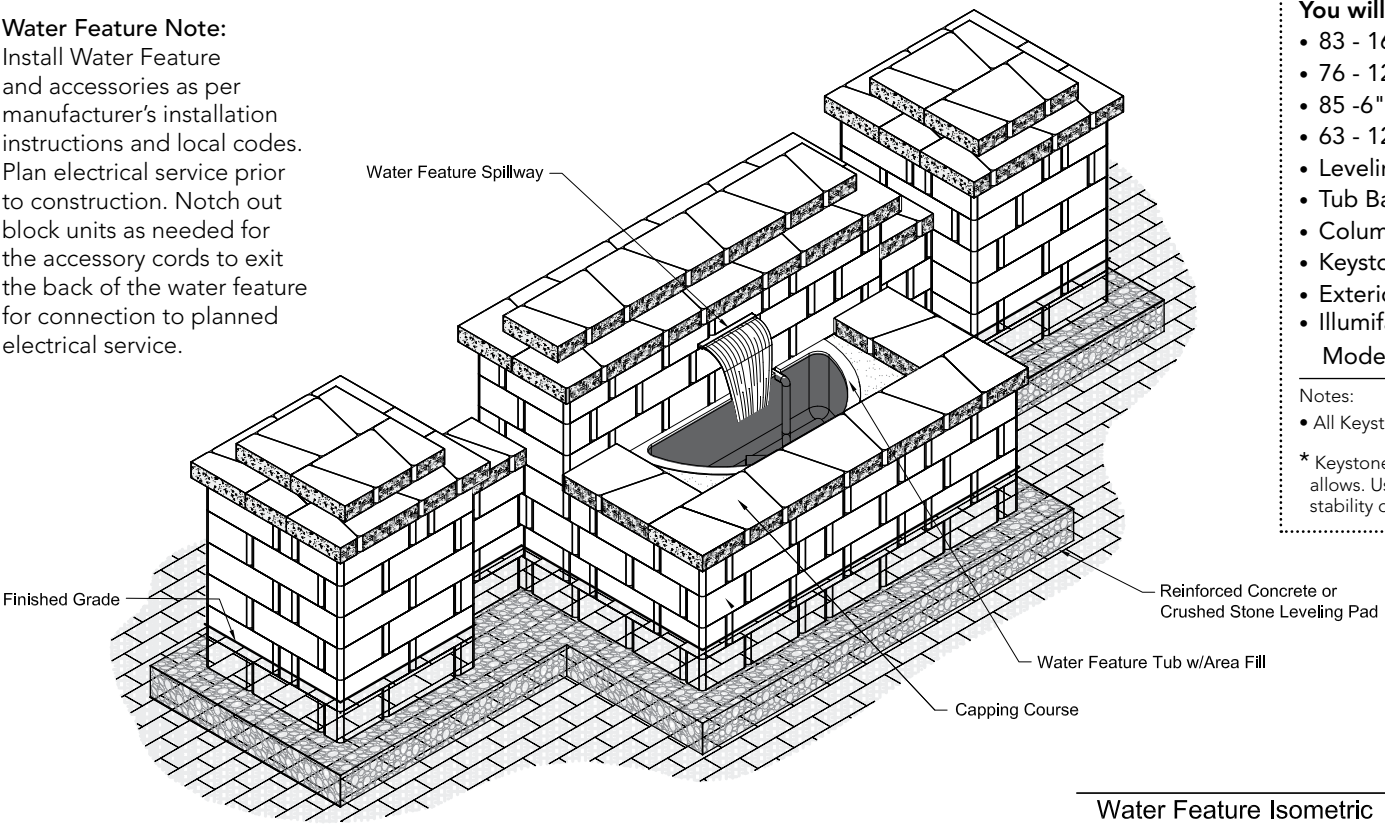


- You will need:**
- 83 - 16"/14"w Large Country Manor/Stonegate units
  - 76 - 12"/10"w Medium Country Manor/Stonegate units
  - 85 - 6"/4"w Small Country Manor/Stonegate units
  - 63 - 12"/10"w Country Manor/Stonegate Cap units
  - Leveling Pad Material - 31.7 cf
  - Tub Base Fill - 7 cf
  - Column Fill Material - 4.2 cf
  - Keystone Interlocking Shouldered Pins\* (approx. 350)
  - Exterior Grade Concrete Adhesive
  - Illumifalls™ 12" Smartfall & Waterkit Shown:  
Model #: AISB12K
- Notes:
- All Keystone Country Manor/Stonegate units are 6"h x 10" d.
- \* Keystone recommends the use of its interlocking pins when alignment allows. Use pins in conjunction with concrete adhesive to maximize stability of your structure.

**Outdoor Water Feature Kit Placement:**  
Outdoor Water Feature may be placed directly on a stable patio surface or be supported by a concrete or crushed stone leveling pad below grade. Below grade leveling pad show here. Adjust height as desired. Add courses below grade if required.

# COURSE BY COURSE INSTRUCTIONS

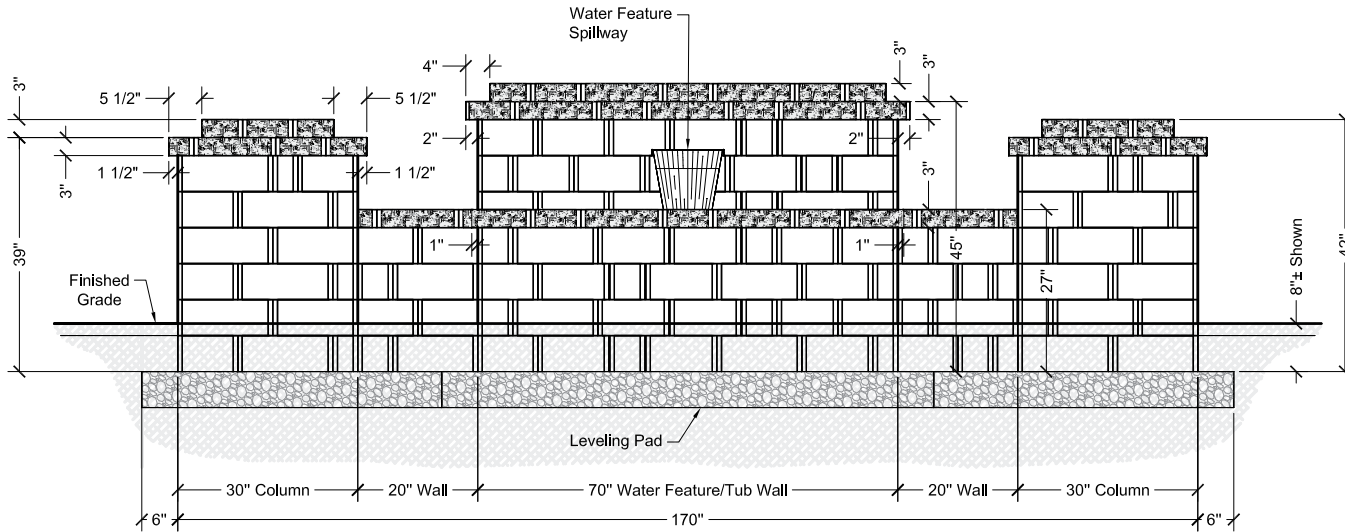


Water Feature Front Elevation

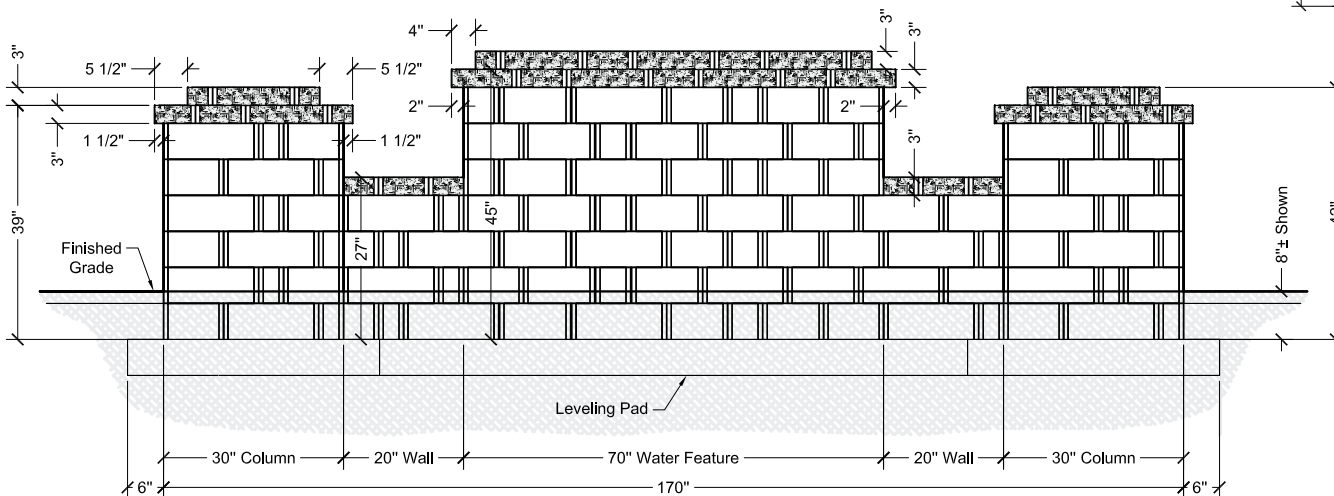

## General Note:

In consideration of freeze / thaw issues during the cold weather season it is recommended that this outdoor Water Feature element be protected from rain, snow and ice as necessary.

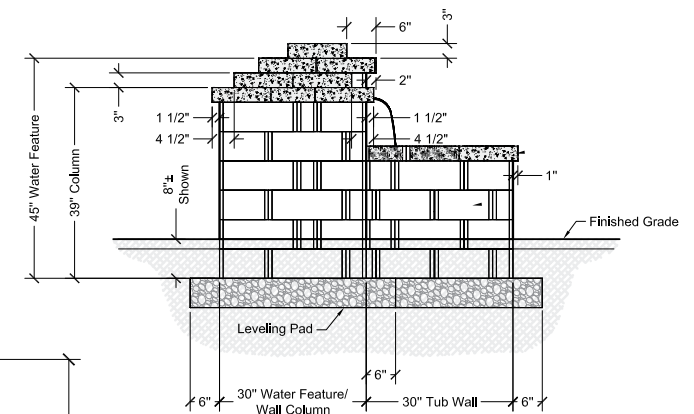


Water Feature Side Elevation

# COURSE BY COURSE INSTRUCTIONS

## 1st Course / Base Isometric

After selecting the location of project, excavate the base trench (according to the dimensions in the plan below). Do not use this excavated material as backfill. Remove all surface vegetation and debris. Start the leveling pad at the lowest elevation. Level the prepared base with 6" of well-compacted granular fill (ex. gravel, road base, or 1/2" to 3/4" [10 - 20 mm] crushed stone). Compact. Do not use PEA GRAVEL or SAND for leveling pad.

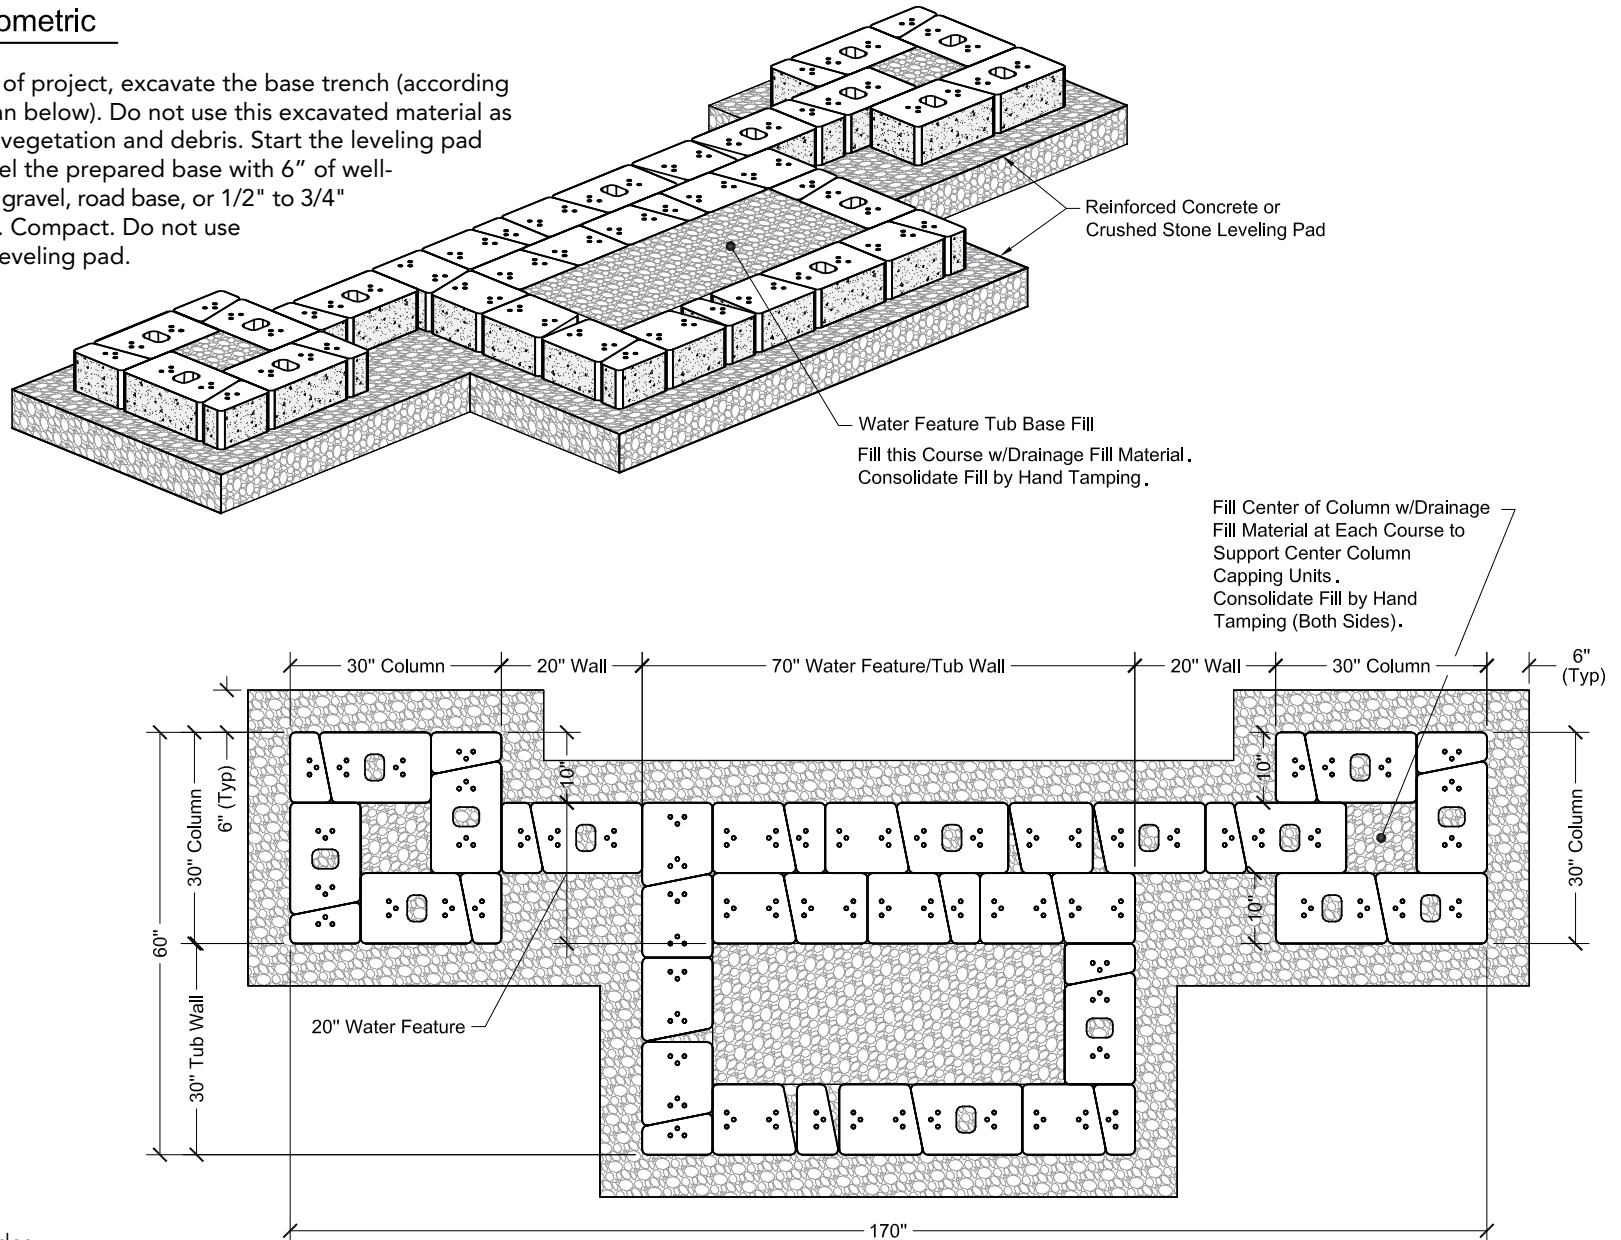



### Remember to:

- Call 811 to locate utility lines prior to digging.
- Follow manufacturer's instructions and local codes pertaining to electrical and water installation elements.

1st Course / Base Plan

# COURSE BY COURSE INSTRUCTIONS

## 2nd Course Isometric

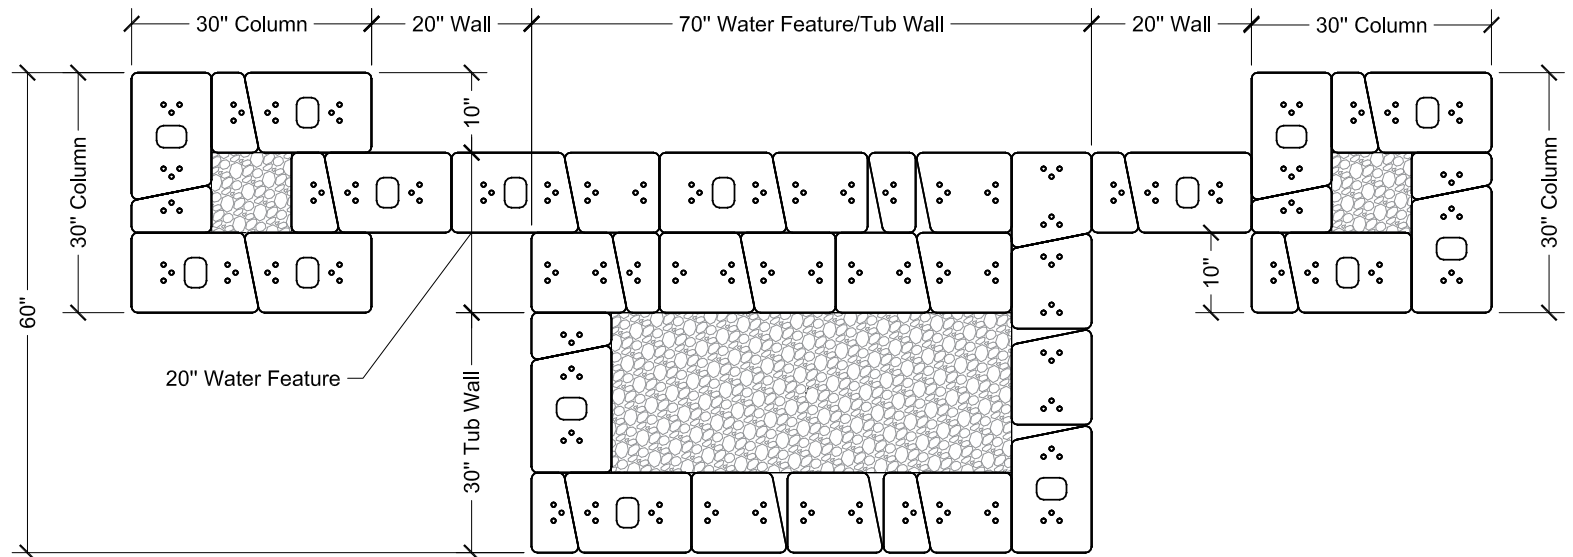
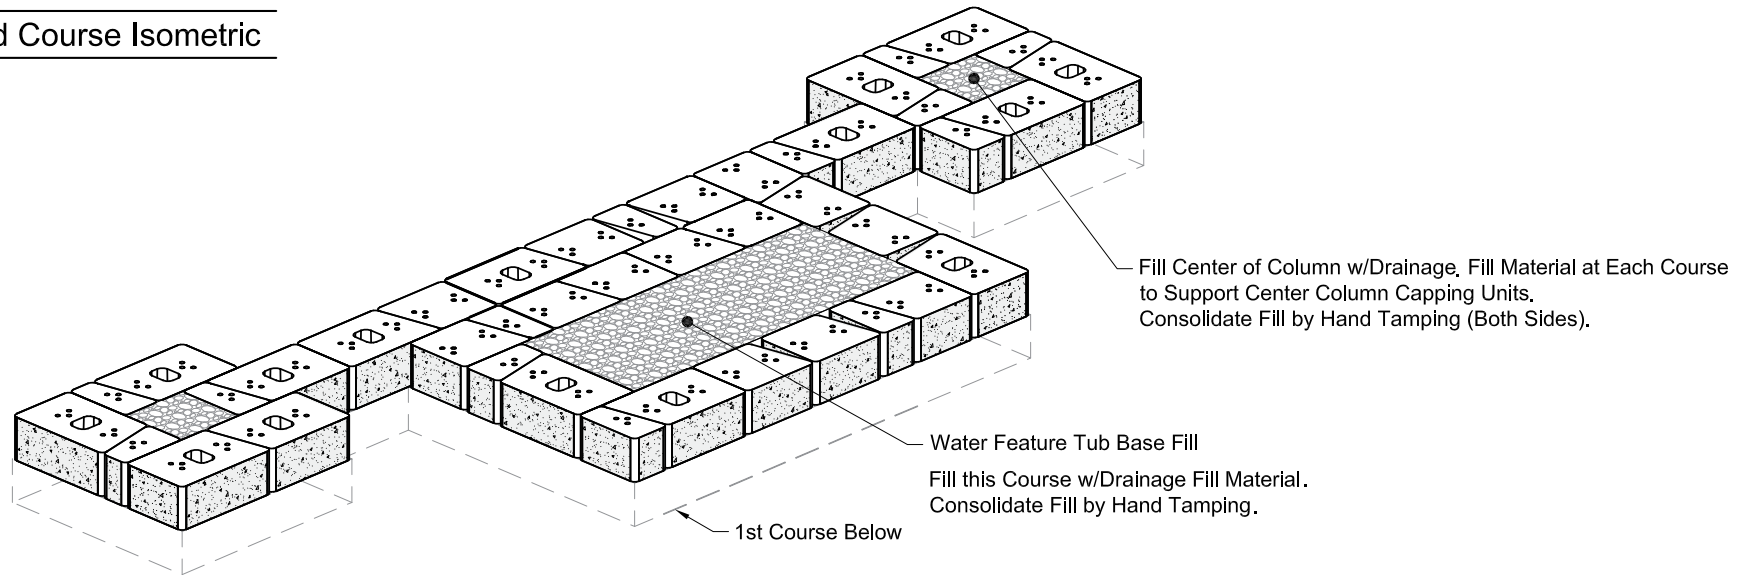


## 2nd Course Plan



# COURSE BY COURSE INSTRUCTIONS


## 3rd Course Isometric

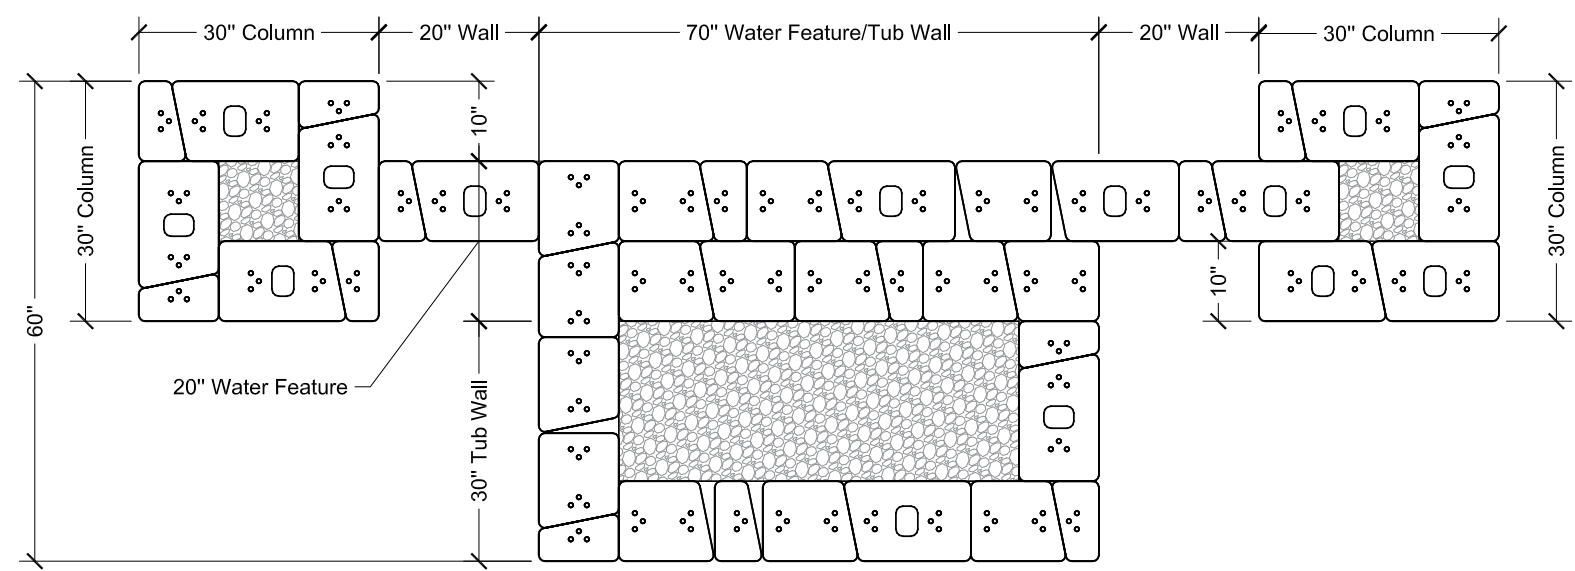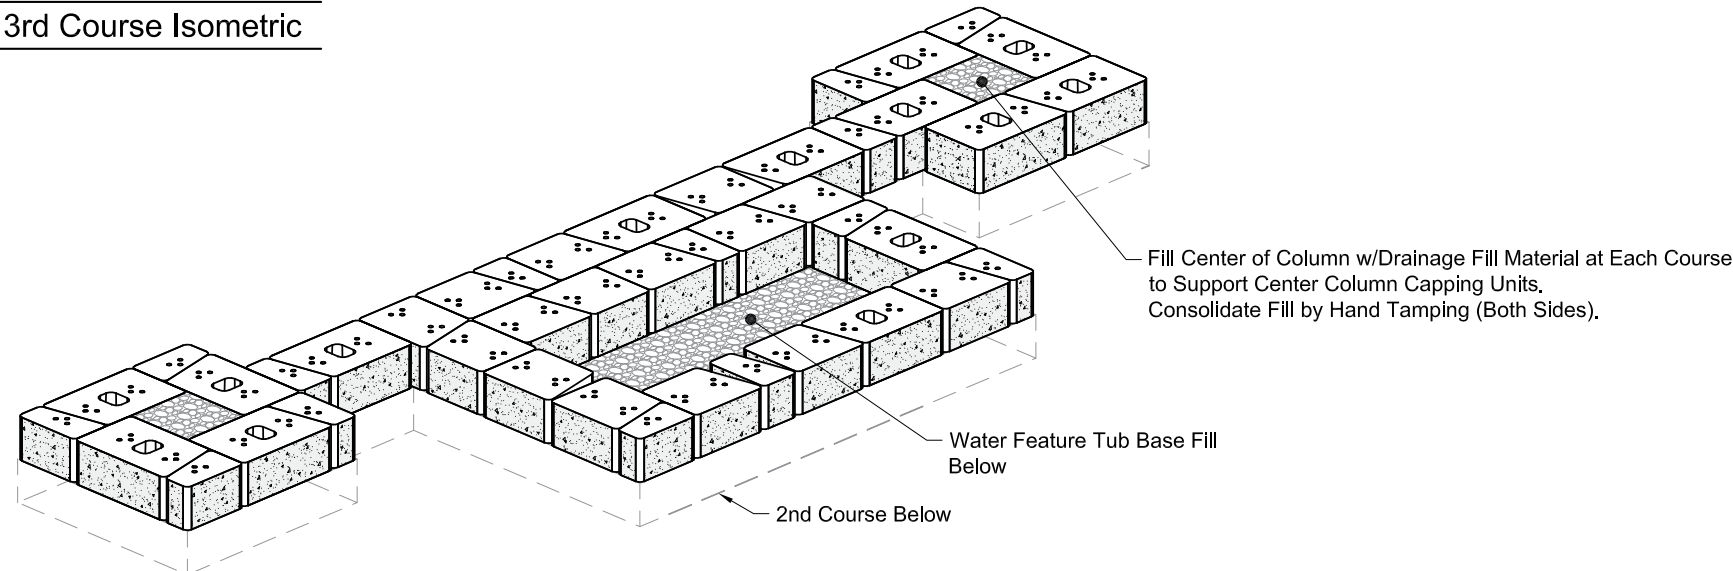

## 3rd Course Plan

# COURSE BY COURSE INSTRUCTIONS

## 4th Course Isometric

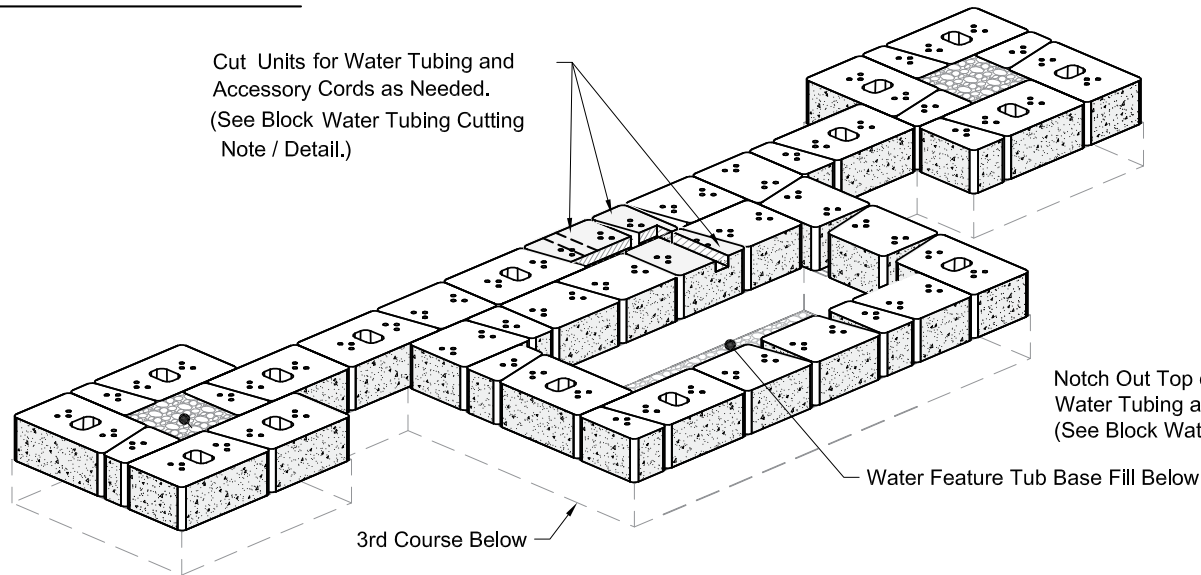


### Block Water Tubing Cutting Note:

Prior to installing tub and water tubing, use them to locate where to notch block. Using a concrete saw or wheel grinder tool w/masonry disk, notch out the top of blocks to place water tubing into so water tubing is flush or just below the top surface of the cut blocks. Allow extra room in notches for tubing to move or bend as well as room for the accessory cords as needed.


Block unit areas to be cut are labeled with angular hatching.

Cut Unit for Water Tubing  
(2 of 3 Cut Blocks Shown).

Notch Out Top of Block to Make Room for Water Tubing and Accessory Cords as Needed.  
(See Block Water Tubing Cutting Note.)

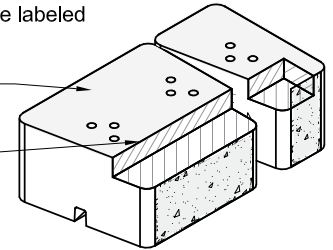


## Block Water Tubing Cutting Detail

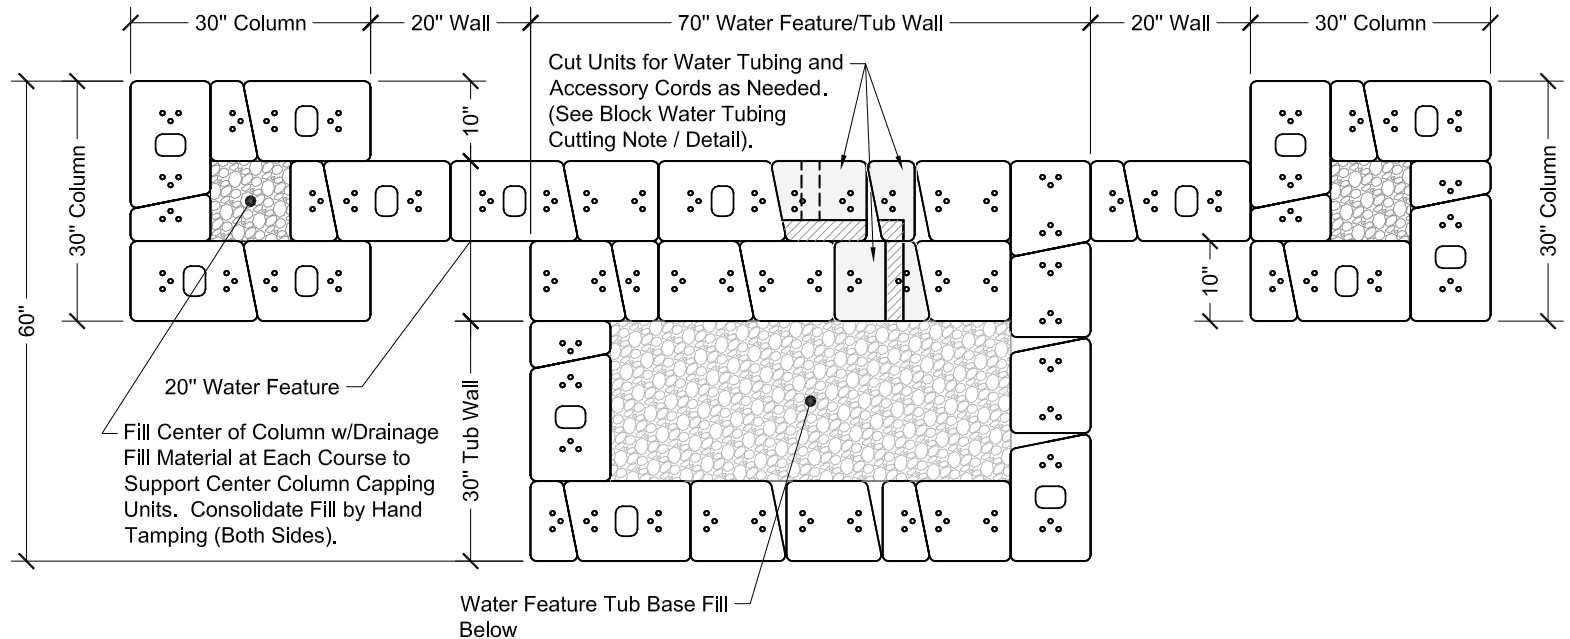

## 4th Course Plan

# COURSE BY COURSE INSTRUCTIONS

## 4th Course Water Feature Isometric

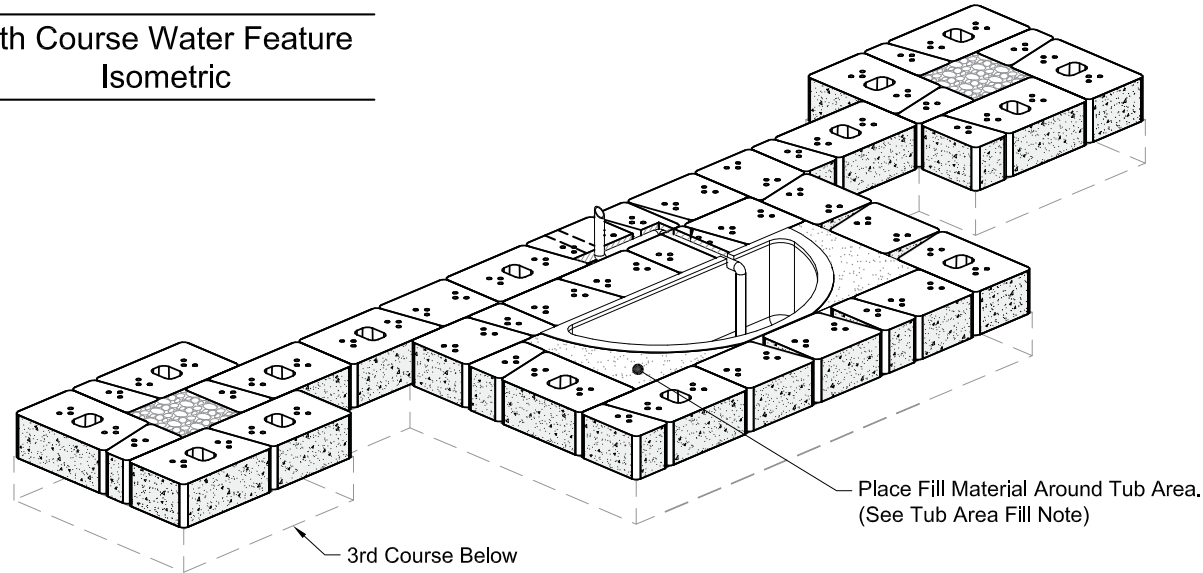


### Tub Placement Note:

Prior to final placement of the water feature tub, verify that the tub lip is level with the top of the 4th course blocks, or at other desired height. Remove or add tub base fill as needed for final placement height. Center tub in water feature tub area prior to placing tub area fill around the tub.

### Tub Area Fill Note:

After installing the tub, fill around the tub with desired fill material.

If backfilling with dirt or other organic material place geotextile fabric or equal around the back side of the tub wall blocks inside of the tub area to prevent the dirt or organic material from washing through the block joints to the outside.

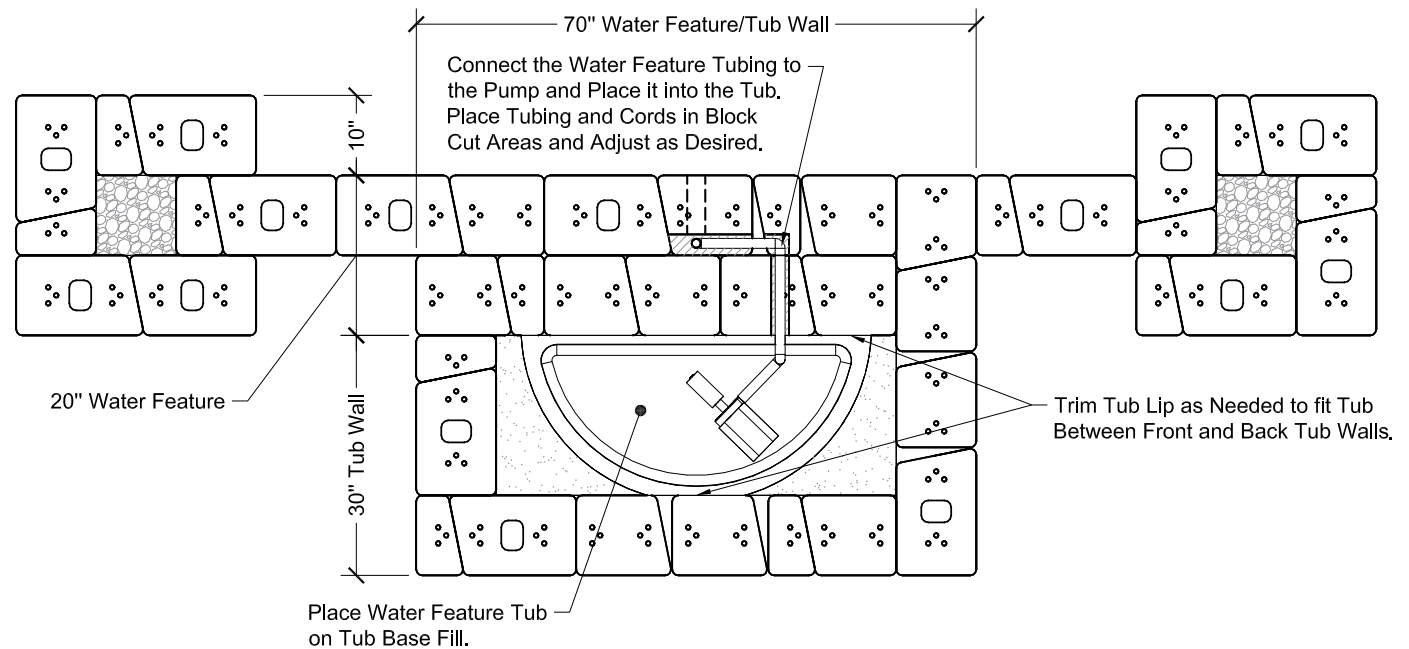


## 4th Course Water Feature Plan



# COURSE BY COURSE INSTRUCTIONS


## 4th Course Capping Isometric

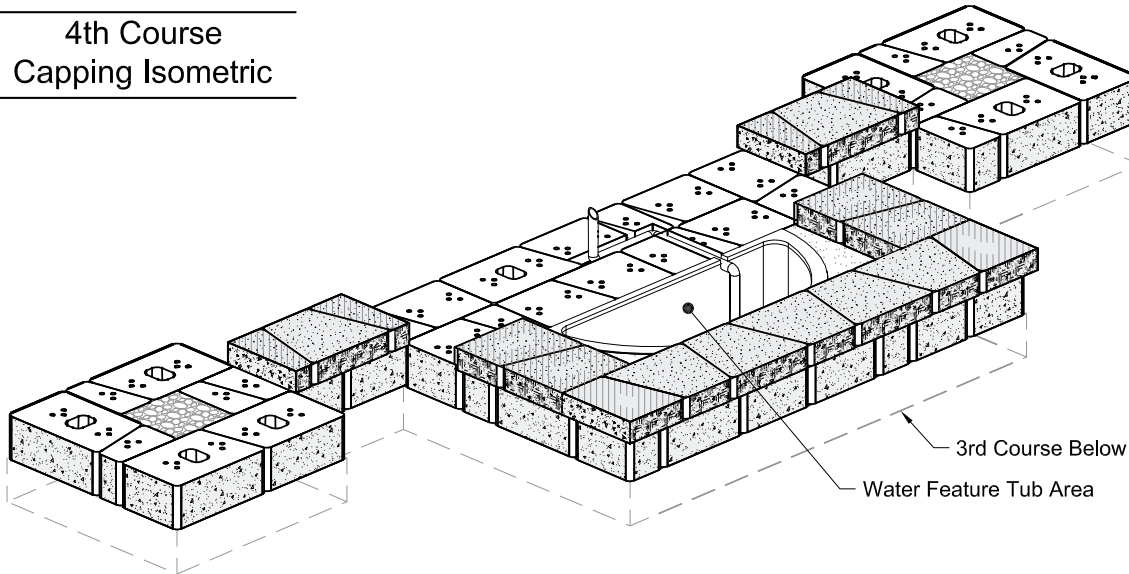

### Cap Unit Note:

Cap units to be cut or hard split are labeled with angular hatching.


Hard split all exposed perimeter cap units labeled "split" cap units and soften the outside edges of the hard split "split" cap units using a masons hammer to match the cap units tumbled edges. Saw cut all other interior "cut" cap units.

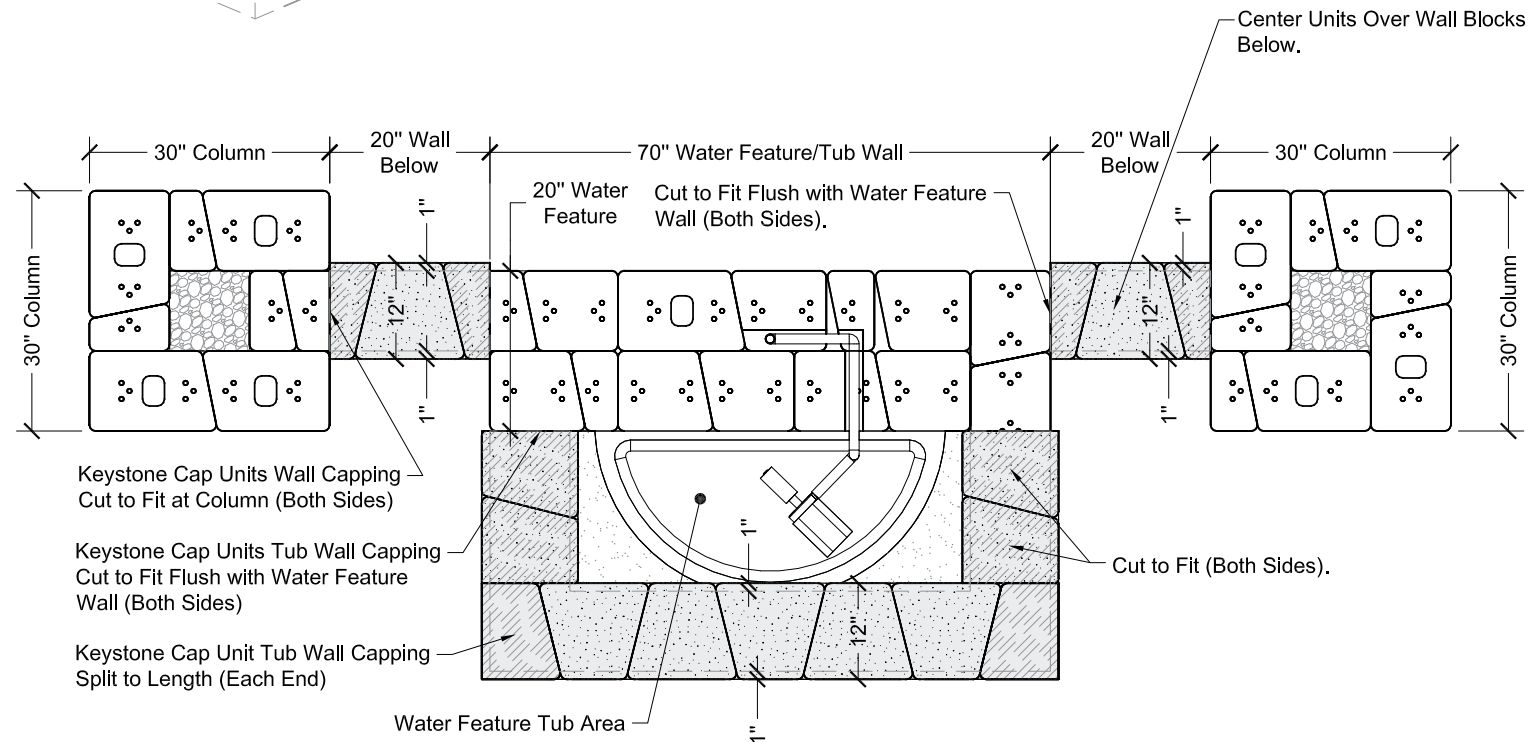

## 4th Course Capping Plan

# COURSE BY COURSE INSTRUCTIONS

## 5th Course Isometric

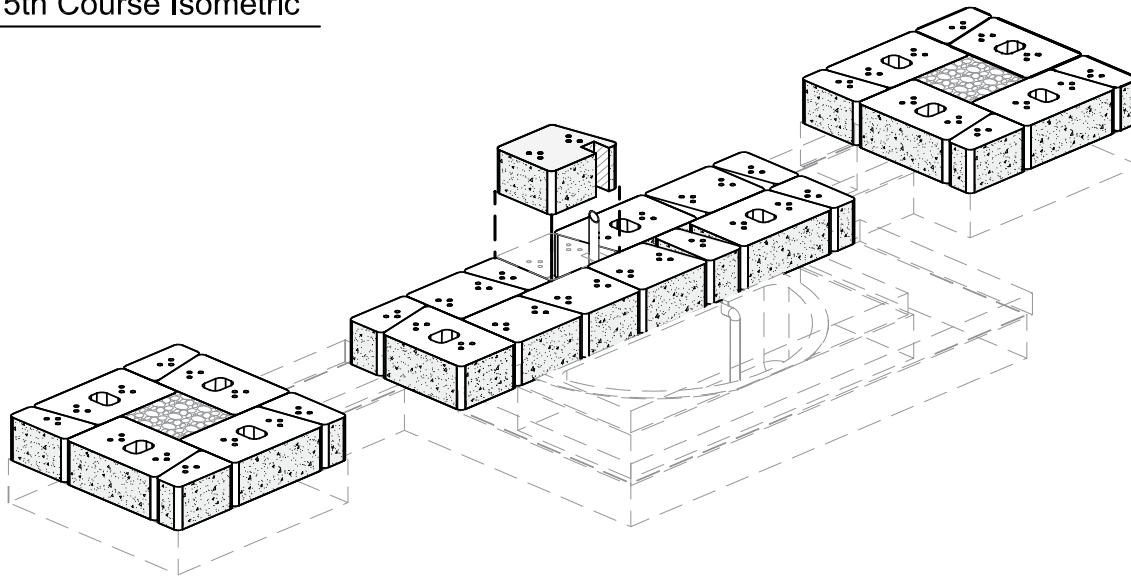

### Block Water Tubing Cutting Note:


Prior to installing block cut unit, using a concrete saw or wheel grinder tool w/masonry disk, notch out the blocks to place water tubing through the cut blocks.

Place cut block unit in position with water tubing going through the cut block unit notch area. Allow extra room in notch for tubing to move or bend as well as room for accessory cords as needed.


Block unit areas to be cut are labeled with angular hatching.

Cut Unit for Water Tubing.

Notch Out Side of Block to Make Room for Water Tubing and Accessory Cords as Needed. (See Block Water Tubing Cutting Note.)

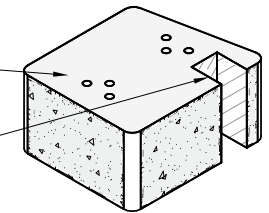

### Block Water Tubing Cutting Detail

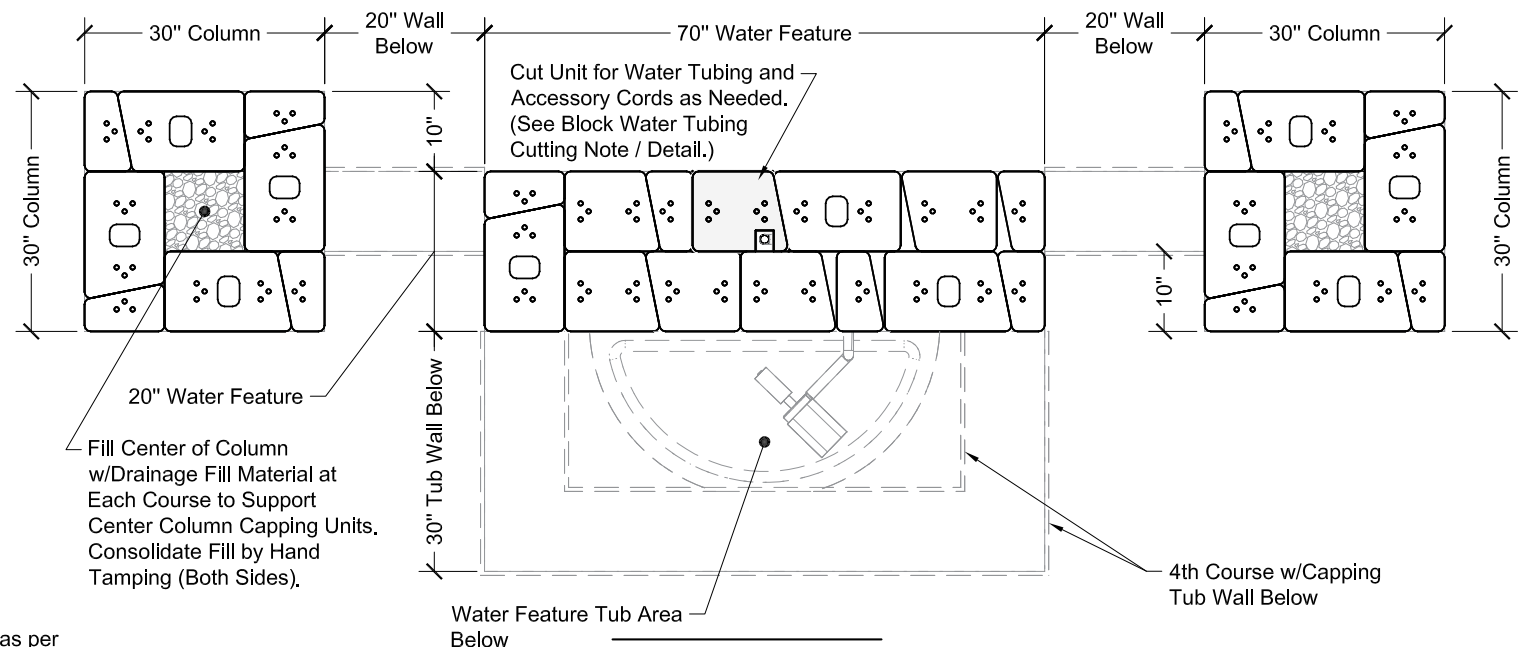


### 5th Course Plan

### Water Feature Note:

Install Water Feature and accessories as per manufacturers installation instructions.

# COURSE BY COURSE INSTRUCTIONS

## 6th Course Isometric

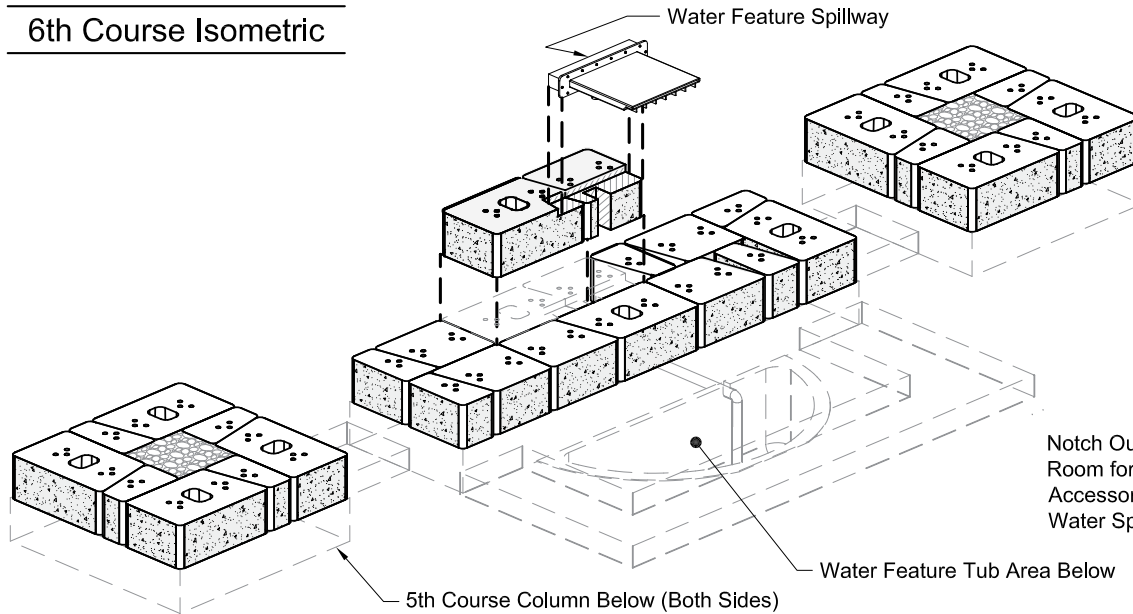


### Block Water Spillway Cutting Note:

Prior to installing the block cut units and spillway, using a concrete saw or wheel grinder tool w/masonry disk, notch out the top and or side of blocks to place water tubing and spillway into. Allow extra room in notches for tubing to move or bend as well as room for accessory cords as needed. Cut into the top of the rear blocks deep enough to set the front of the spillway in contact with the top of the front blocks.


Block unit areas to be cut are labeled with angular hatching.

Cut Unit for Tubing and Spillway.

Notch Out Top and or Side of Block to Make Room for Tubing and or Spillway Above and Accessory Cords as Needed. (See Block Water Spillway Cutting Note.)

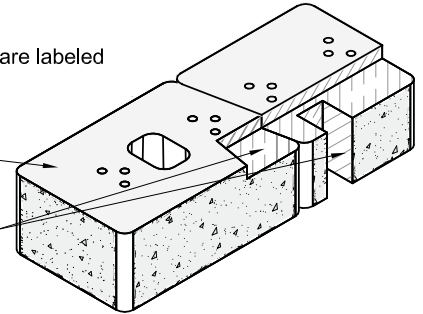

### Block Water Spillway Cutting Detail

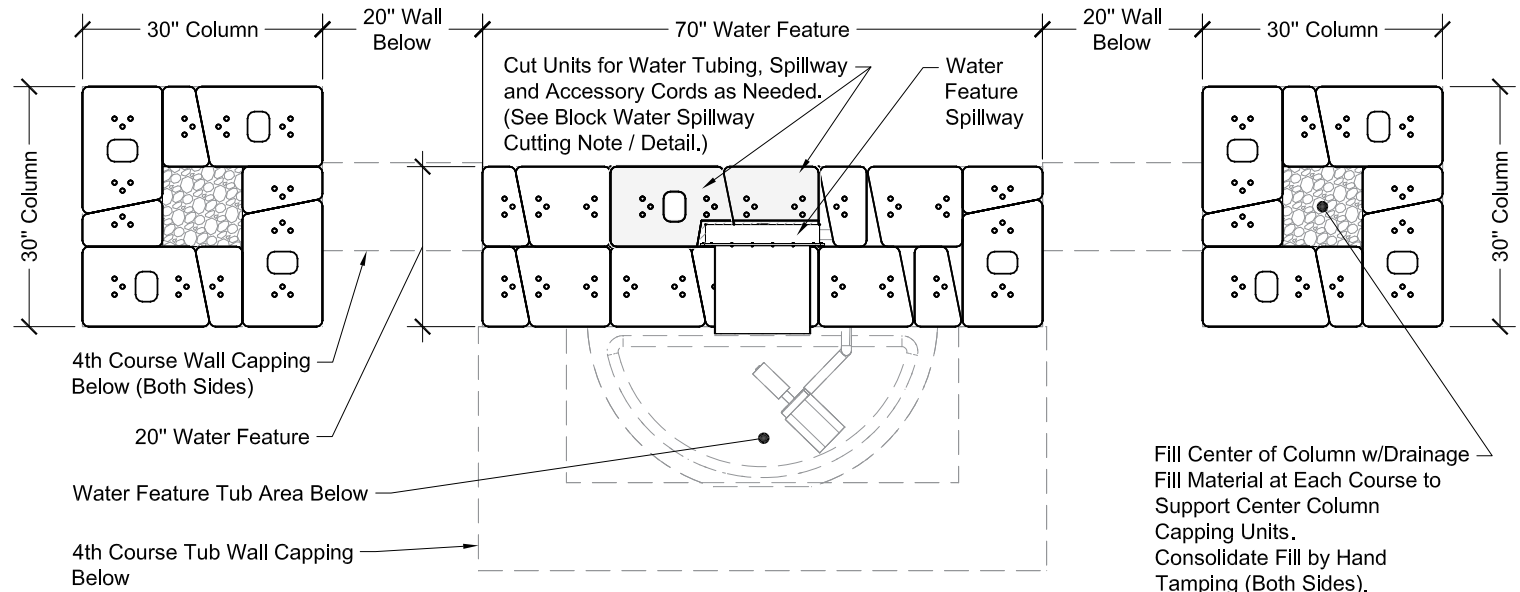

## 6th Course Plan

### Water Feature Note:


Install Water Feature and accessories as per manufacturers installation instructions.



# COURSE BY COURSE INSTRUCTIONS

## 6th Course Capping Isometric


Column Capping Split to Length (Typ) (Each End) (Both Sides).

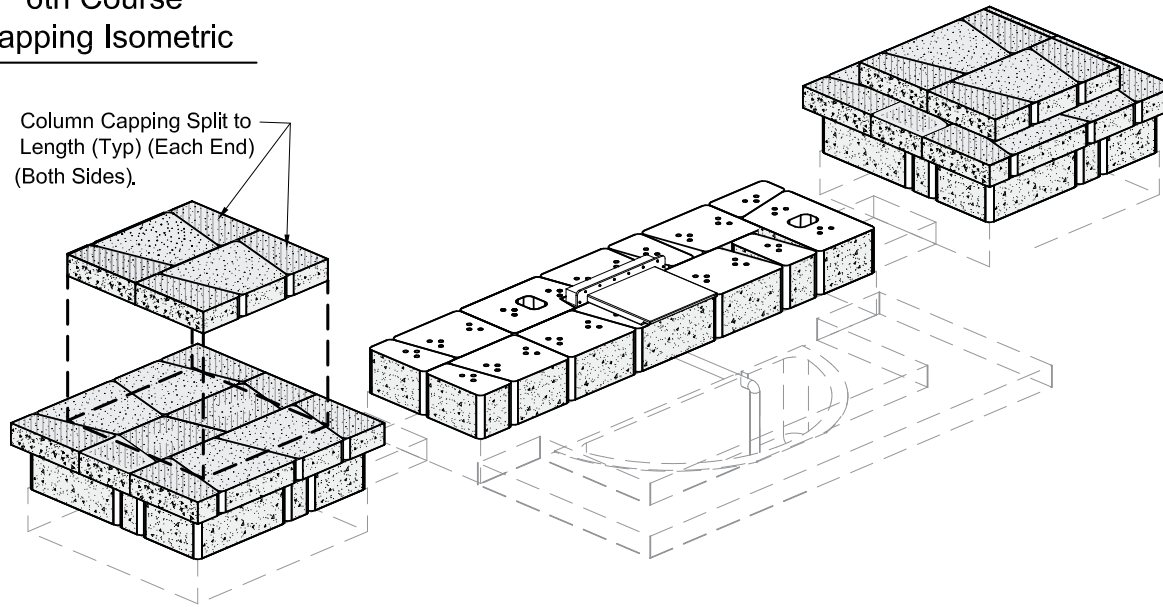

### Cap Unit Note:

Cap units to be cut or hard split are labeled with angular hatching.


Hard split all exposed perimeter cap units labeled "split" cap units and soften the outside edges of the hard split "split" cap units using a masons hammer to match the cap units tumbled edges. Saw cut all other interior "cut" cap units.

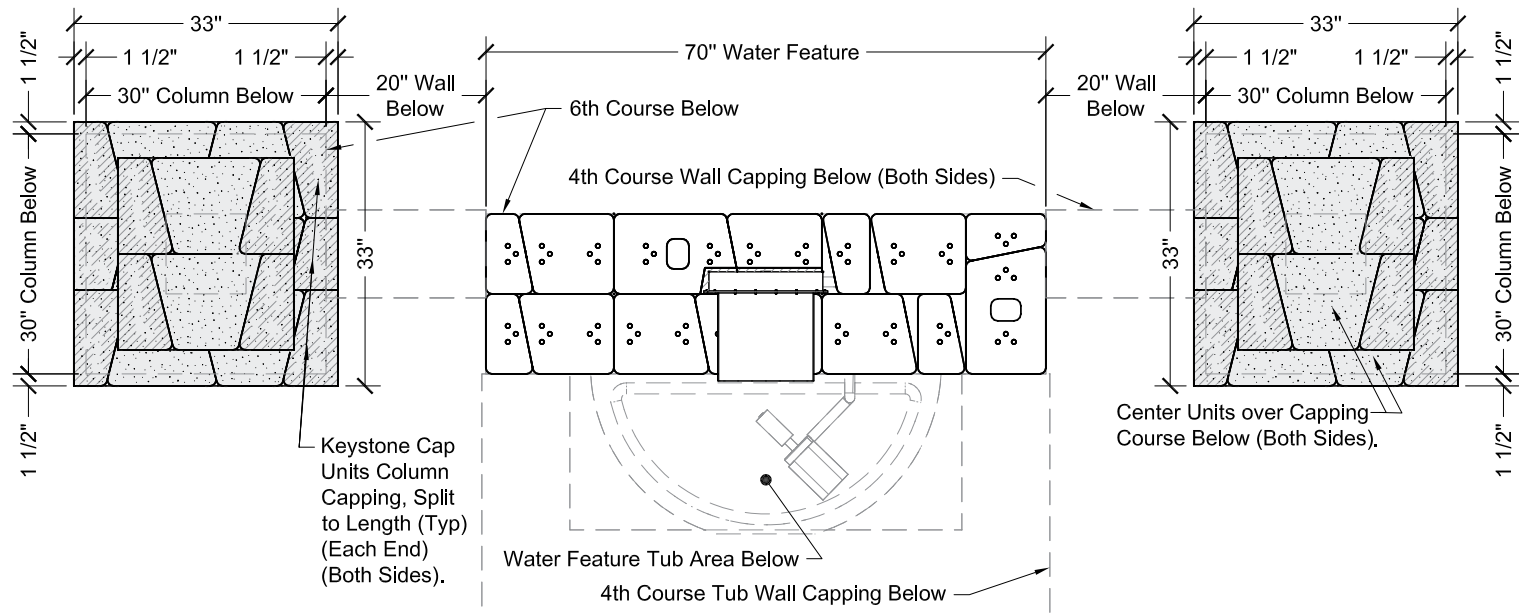

6th Course Capping Plan

# COURSE BY COURSE INSTRUCTIONS

## 7th Course Isometric

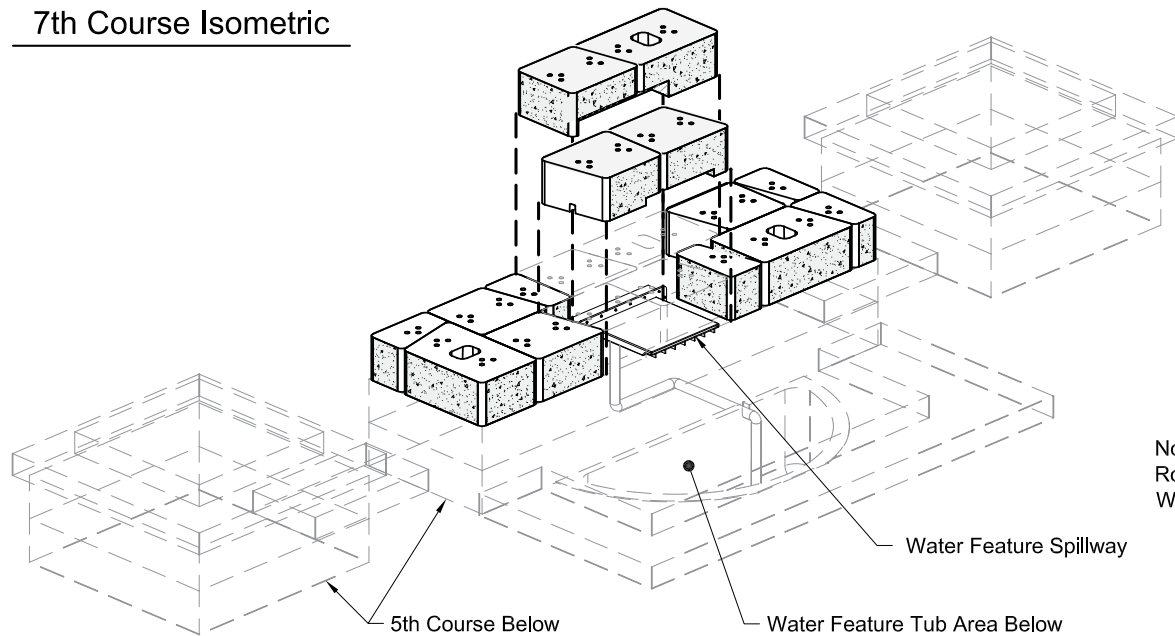


### Block Water Spillway Cutting Note:


After installing the water tubing and spillway, using a concrete saw or wheel grinder tool w/masonry disk, notch out the bottom of front and back blocks enough to place over spillway and set flush to 6th course below.

For best appearance make front outside notches close to spillway.

Block unit areas to be cut are labeled with angular hatching.

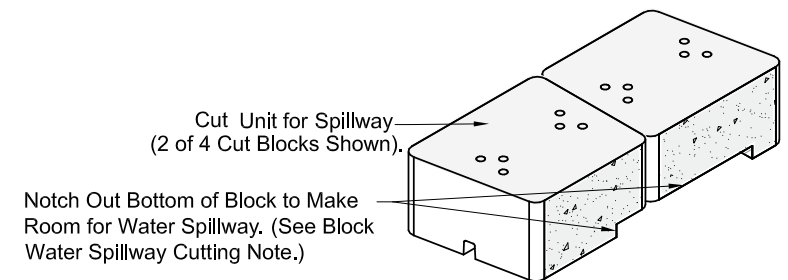

## Block Water Spillway Cutting Detail

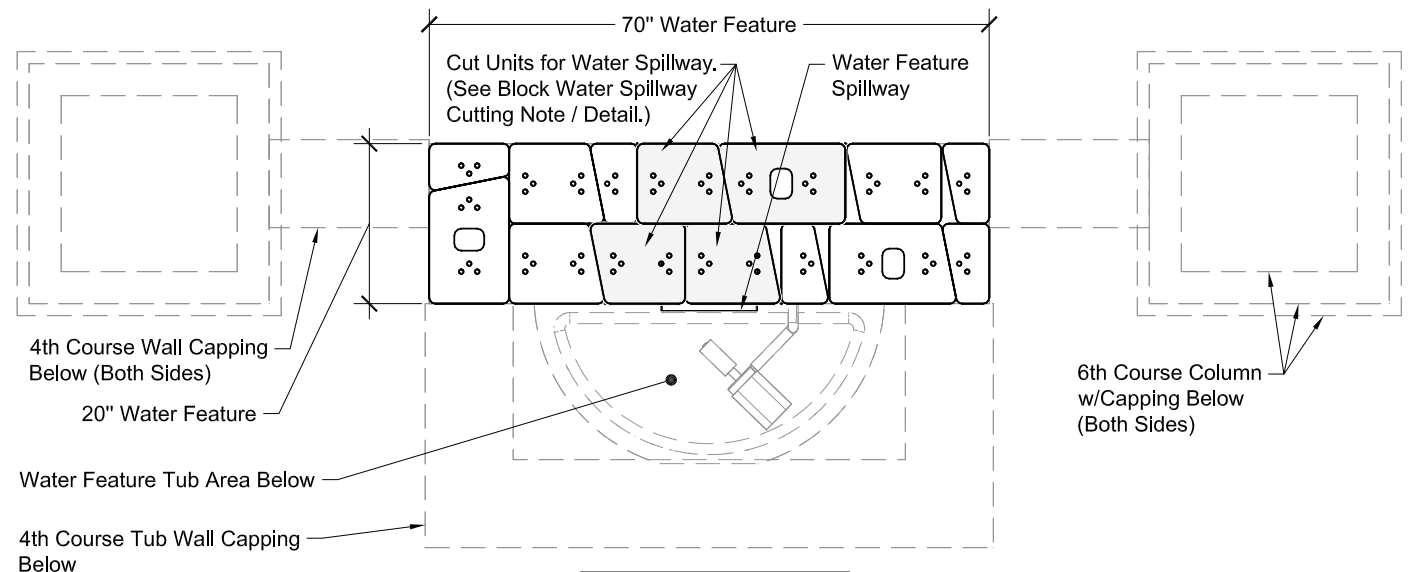


## 7th Course Plan

### Water Feature Note:

Install Water Feature and accessories as per manufacturers installation instructions.

# COURSE BY COURSE INSTRUCTIONS


## 7th Course Capping Isometric

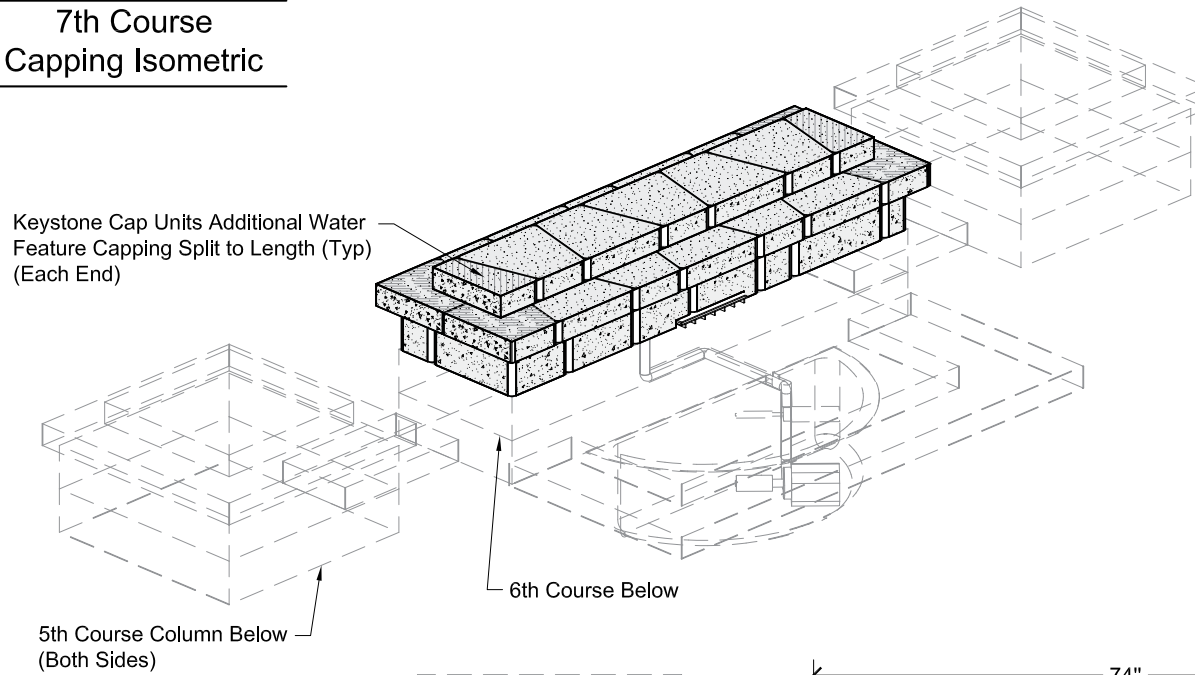

### Cap Unit Note:

Cap units to be cut or hard split are labeled with angular hatching.

Hard split all exposed perimeter cap units labeled "split" cap units and soften the outside edges of the hard split "split" cap units using a masons hammer to match the cap units tumbled edges. Saw cut all other interior "cut" cap units.

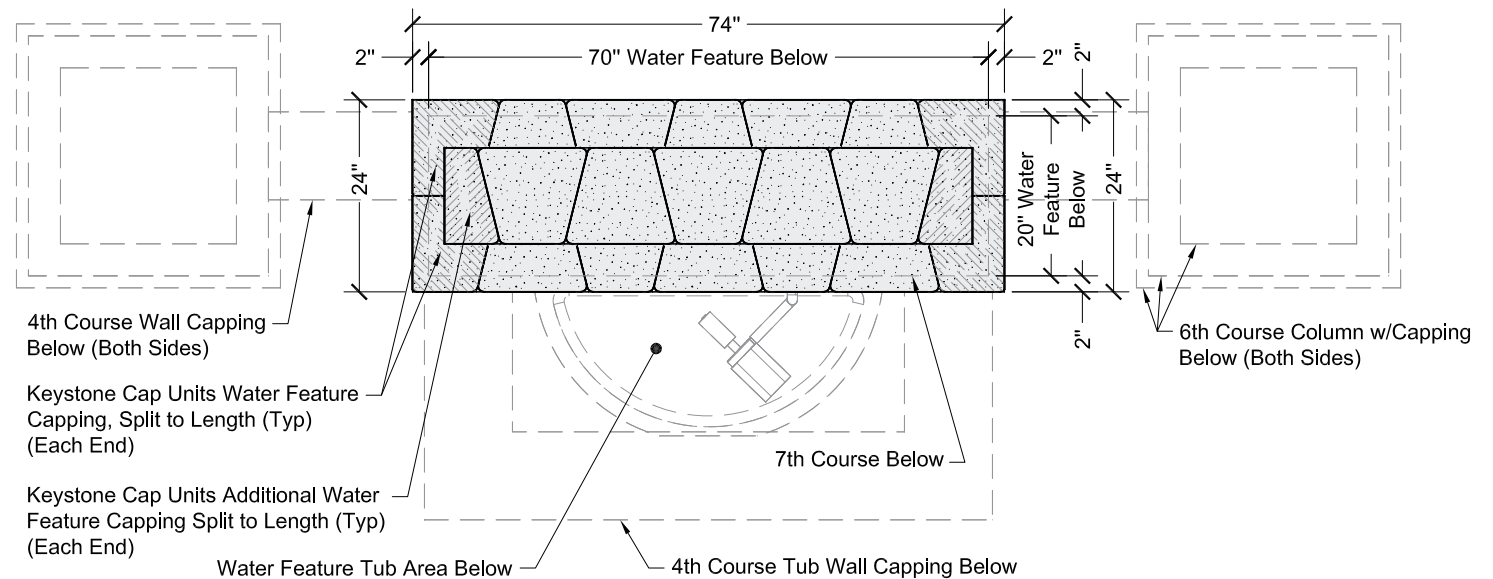

## 7th Course Capping Plan



Don't forget to check out all of our Keystone Outdoor Living designs on [keystonewalls.com](http://keystonewalls.com).



Outdoor Kitchen Designs



Fireplaces



Columns



Fire Pits



Outdoor Table



Bench



Keystone Retaining Wall Systems LLC  
4444 West 78th Street • Minneapolis, MN 55435  
(952) 897-1040 • [www.keystonewalls.com](http://www.keystonewalls.com)

FOLLOW US



We reserve the right to improve our products and make changes in the specifications and design without notice. The information contained herein has been compiled by KEYSTONE and to the best of our knowledge, accurately represents the KEYSTONE product use in the applications which are illustrated. Final determination of the suitability for the use contemplated and its manner of use are the sole responsibility of the user.