


Capestone ROUND FIRE PIT

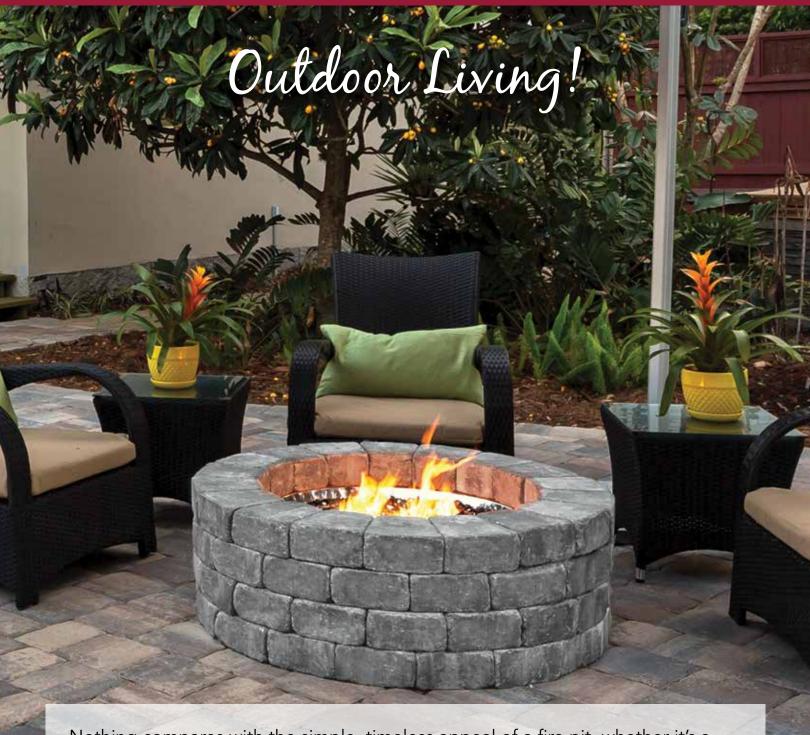

Nothing compares with the simple, timeless appeal of a fire pit, whether it's a gathering place for family and friends or a calming outdoor haven at the end of a hectic day. A **Capestone** fire pit kit will be a great weekend project that will bring the best of memories to you and your family.

Capestone

ROUND FIRE PIT

Installation

Step 1 | Foundation


Place and compact a level base with gravel extended beyond the Capestone fire wedge units by at least 4 inches. The surface of the leveling pad should extend below grade by 2 inches. If you are using a concrete paver base, place Capestone units directly onto the base. Fill the bottom with 2-4 inches of sand for drainage.

Step 2 | Install Base Course

Lay out the Capestone Fire Pit with a 301/s" diameter from the inside wall. Use 18 units per layer. Adjustments to the circle of units may be necessary to ensure alignment as the unit should fit tightly together. Ensure the first layer is level front-to-back and side-to-side.

Step 3 | Install Additional Layers

Apply a bead of exterior grade construction adhesive to the base layer of units. The second course units should be centered over the two units below to establish a running bond.

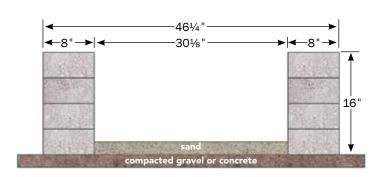





Capestone Fire Pit



Fire Wedge



29" Fire Ring/2" Flange

Available Colors



Granite Blend

Specifications

Product	Height	Width	Depth	Weight	Units/Pallet	Sq. Ft./Pallet
Fire Wedge	4"	8" / 5.375"	8"	17 lbs	72	16

Dimensions	Kit Includes:
16" High, Inside Diameter - 301/8" Outside Diameter - 461/4"	72 Fire Wedge units (4 courses, 18 units per course), 29" Fire Ring, 2" Flange



Tan/Charcoal

Important Note: Burning large items or trash in fire pits may cause damage to the Capestone units. Our fire features are designed strictly for small fires. Hi-Way recommends a steel insert to protect units and will not be held liable for damage to the fire pit or coping if an insert is not used.

Distributed by:



2746 Cranberry Hwy Wareham, MA 02571 508-295-0834 (Phone) 508-291-2852 (Fax) www.hiwayconcrete.com