BLUE RIDGE

Multi-size rectangular shapes with a textured riven surface and slightly chamfered edges give this paver a beautiful look. Not recommended for vehicular applications.



paver-**shield™** pavers

paver-shield[™] has a tight, smooth surface texture and will not expose heavy aggregate as it wears. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are **guaranteed not to fade!**



- PATIOS
- POOL DECKS
- COURTYARDS

Blue Ridge | Color: Pennsylvania Blue



BLUE RIDGE

	WIDTH	LENGTH	THICKNESS	PCS / SF	SF / PALLET	PCS / PALLET	LBS / PALLET
Α	6½"	13"	2¾"	3.8		40	
В	13"	13"	23⁄8"	1.9	106	40	2,761
С	13"	19½"	2¾"	1.3		20	








INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

2% Modified **Neoprene Adhesive** NICOLOCK PAVING STONE 1"-31/8" THICK 3/4" Bituminous Setting Bed **Concrete Asphalt or Compacted Aggregate Compacted Sub-Base CROSS-SECTION OF TYPICAL INSTALLATION** Pavers

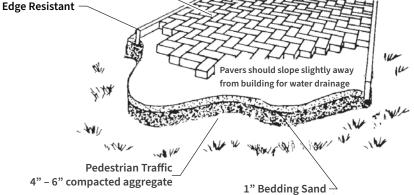

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.





Adobe Blend

Chesapeake Blend*





Crab Orchard Blend*

Golden Brown Blend





Granite City Blend







Mocha Blend

Oceanic Blue






Oyster Blend*

Pennsylvania Blue**



Westchester Blend

> *Premium Colors **Deluxe Colors





📑 in. 🛗 🗲 😰 🕤

Corporate HQ: 612 Muncy Avenue | Lindenhurst | NY | 11757 | 631.669.0700 | nicolock.com

